

Spring-Loaded Connector 100 mil / 2.54 mm

HIGHLIGHTS

Short, compact size

Board-to-board contacting

Distance compensation

Tape on Reel - SMD / Automated Assembly

2 to 20 poles / 1 and 2 rows available

MECHANICAL DATA

Center 2.54 mm/100 mil

ELECTRICAL DATA

Max. current rating 3.5 A

Typical continuity resistance $\leq 20 \text{ m}\Omega$

Typical isolation resistance $10^{10} \text{ }\Omega\cdot\text{m}$

MATERIALS

Pad contact Brass, gold-plated

Test Probe block PA

TAPE-ON-REEL (EN 60286-3)

Reel (RD /")	Width (R/mm)	Pitch (RP/mm)	Pieces (PCS)
15	24/44	12	800




PTR HARTMANN

A Phoenix Mecano Company


Technical Data // Series PKB 5322 - SMD

Spring-Loaded Connector 100 mil / 2.54 mm


Soldering profile reflow

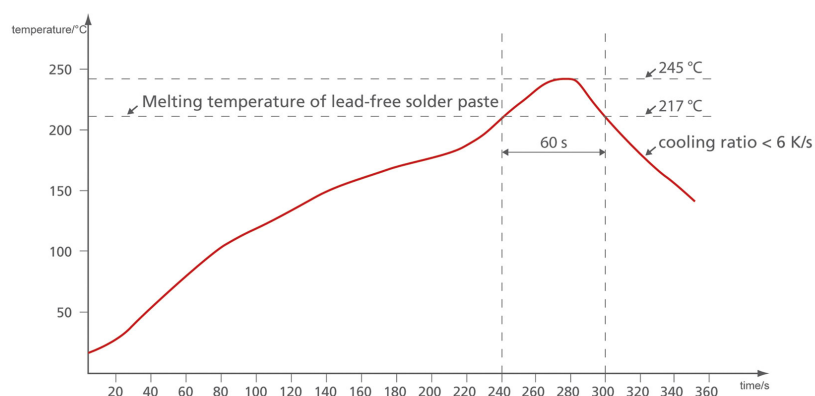

PKB5322/1

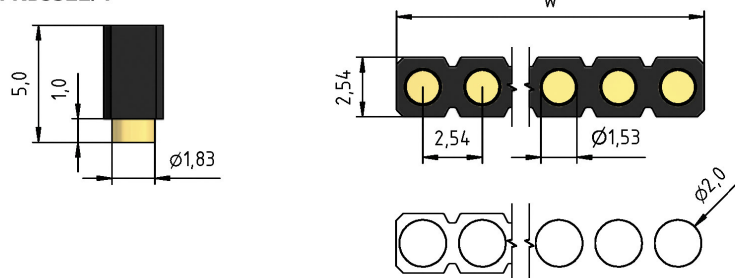

PKB5322/2

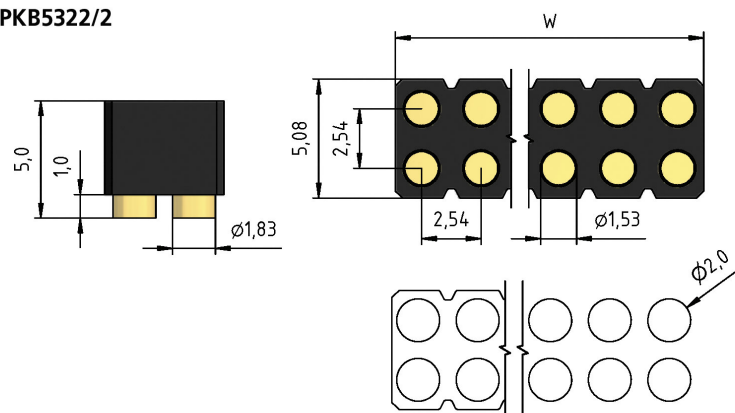

HOW TO ORDER

PKB5322/ 1 - 02 - 50 - R24

1	2	3	4	5
1	2	3	4	5

1. Series 2. Number of Rows 3. Number of Poles
4. Installation Height 5. Tape on Reel